




## MEDIA CREATIVE

[ MDC SERIES ]

MDF2S(I) MDF3S(I) MDF4S(I) MDF4S(O)

- Customized your own LED screen (size and design)
- High flexibility
- Ultra-thin & light weight
- Non-cabinet or curved cabinet
- Easy assemble
- Clear curved and vivid picture

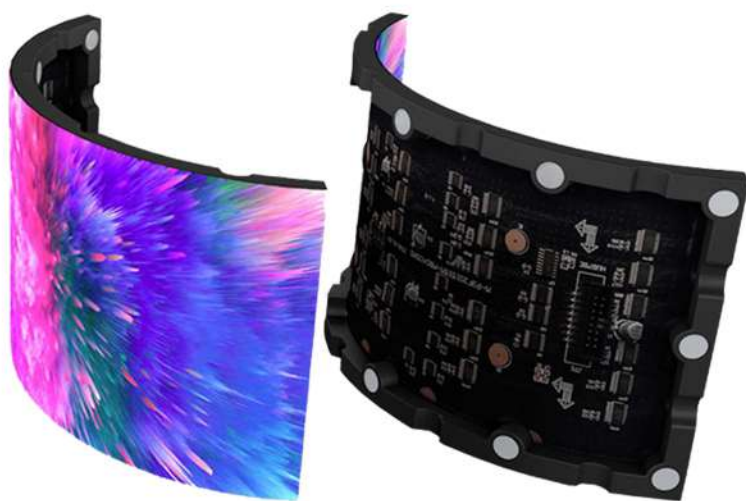

# TECHNICAL PARAMETERS

Parameter	MDC4S(I)	MDC3S(I)	MDC2S(I)	MDC4S(O)
Pixel configuration	3-in-1 SMD2121	3-in-1 SMD1515	3-in-1 SMD1010	3-in-1 SMD1921
Pitch(mm)	4.00	3.00	2.50	4.00
Module size(mm)(wxh)	256x128	240x120	240x120	256x128
Module resolution(wxh)	64x32	80x40	96x48	64x32
Pixel density (pixels/m <sup>2</sup> )	62500	111111	160000	62500
Screen environment	Indoor	Indoor	Indoor	Outdoor
Curve angle(°)	0-360			
Screen thickness(mm)	13.6			
Cabinet weight(kg/m <sup>2</sup> )	10-15			
Cabinet serviceability	Front			
Ingress protection (front/rear)	IP43/IP31			
Brightness	1200	1000	1000	4500
Brightness control	256 levels Manual/Automatic			
Contrast ratio	4000 : 1			
Color	4.4 Trillion			
Grayscale	14 bit			
Frame rate(Hz)	50&60			
Refresh rate(Hz)	3840			
Horizontal viewing angle(°)	120	120	140	140
Vertical viewing angle(°)	120	120	140	140
Max power consumption(w/m <sup>2</sup> )	≤ 1080			
Average power consumption(w/m <sup>2</sup> )	≤ 360			
Drive mode	Constant current drive			
Operation temperature(°C)	-10 to 50			
Operation humidity(RH)	10%-90% no condensation			
Input signal	DVI/HDMI/VGA/SDI/DP/AV/S-Video, etc.			
Data interconnection	Network cable(L ≤ 100m), Multi-mode fiber (L ≤ 300m), Single mode fiber (L ≤ 15km)			
Lifetime(hrs)	100000			



\*\*\*All specifications are subjected to change without notice

"We are professional in audio visual systems"



CHINAVUT MARKETING CO., LTD.

63,65,67 Soi Rungruang , Ratchadapisek Rd., Samsaennok , Huay-Kwang Bangkok 10320  
Tel : 0-2694-3000 , Email : info@chinavut.com , www.chinavut.com

Available from :

